



YH-3.5

FOUR POST LIFT

More information please login
www.oparck.com
www.sxdinggao.en.alibaba.com

PRODUCT DESCRIPTION

- Beam using high strength rectangular tube with beautiful appearance.
- Platform overall molding, bearing up to 3.5 tons .
- Automatic rest type pneumatic safety valve .Safety, reliable and high efficiency synchronization.
- Standard oil-water separator with pressure gauge.
- The wire rope fracture protective mechanism can effectively prevent the cable drop fast when fracture.
- Optional slide plate for four-wheel alignment.
- Optional hydraulic rolling jack, bearing 4500 lbs(2 tons), lifting height 330mm, and there is hose bracket on the column.
- Yellow warning parts on the slope, at the same time of warning also protect the ground friction.
- Four columns secure level accurate adjustable.
- There is a throttle valve on the channel for oiling.
- All moving parts are equipped with grease nipple ,convenient to fill lubricating oil.
- Export-type pneumatic safety components have long service life and high synchronization efficiency.




YH-3.5

FOUR POST LIFT



Technical parameters

Model	YH-3.5T
LxWxH	5127.5x3555x2216mm
Lifting Height	1950mm
Lifting Time	50s
Length of Columns	4030mm
Overall Length	5127.5mm
Inside Soleplate of Columns Width	2785mm
Overall Width	3555mm
Platform Length	4300mm
Lifting Capacity	3500kg
Runway Width	480mm
Width Between Runway	1000mm
Packing Size	4400x570x800mm
Gross Weight	960kg

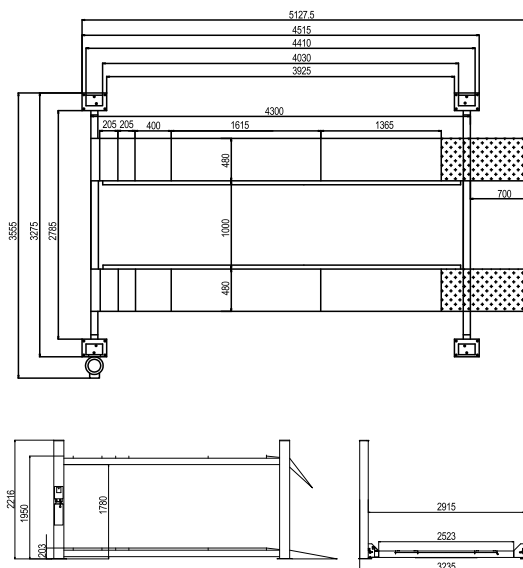

Detail



Up ramp with slider can protect friction.

Hydraulic cylinder under runway with explosion-proof valve.

Structure of cable and pulley under main runway.

Active plate can fit for different size turntable.

Slide plate for wheel alignment.

Optional rolling jack.

OPARCK

More information please login:
www.oparck.com www.sxdinggao.en.alibaba.com

SHAOXINGDINGGAOMECHANICALEQUIPMENT CO., LTD.

NO.186 Mashan Road, Paojiang Industrial Zone, Shaoxing, Zhejiang, China
 TEL: 0086-0575-84623366 FAX: 0086-0575-84623331
 E-mail: lichao@dinggaomechanical.com



www.oparck.com



www.sxdinggao.en.alibaba.com



YH-4.0B

FOUR POST LIFT

More information please login
www.oparck.com
www.sxdinggao.en.alibaba.com

PRODUCT DESCRIPTION

- Beam using high strength rectangular tube with beautiful appearance.
- Platform overall molding, bearing up to 4 tons .
- Manual mechanical reset insurance mechanism .Safety, reliable and high efficiency synchronization.
- The cable fracture protective mechanism can effectively prevent the cable drop fast when fracture.
- Optional slide plate for four-wheel alignment.
- Optional hydraulic rolling jack, bearing 4500 lbs(2 tons),lifting height 330mm, and there is hose bracket on the column.
- Yellow warning parts on the up ramp, at the same time of warning also protect the ground friction.
- Four columns secure level accurate adjustable.
- There is a throttle valve on the channel for oiling.
- All moving parts are equipped with grease nipple ,convenient to fill lubricating oil efficiency.




YH-4.0B

FOUR POST LIFT



Technical parameters


Model	YH-4.0B
LxWxH	5645x3436x2222mm
Lifting Height	1850mm
Lifting Time	50s
Length of Columns	4290mm
Overall Length	5645mm
Inside Soleplate of Columns Width	2546mm
Overall Width	3436mm
Platform Length	4600mm
Lifting Capacity	4000kg
Runway Width	508mm
Width Between Runway	1000mm-1100mm
Packing Size	4750x570x725mm
Gross Weight	1140kg

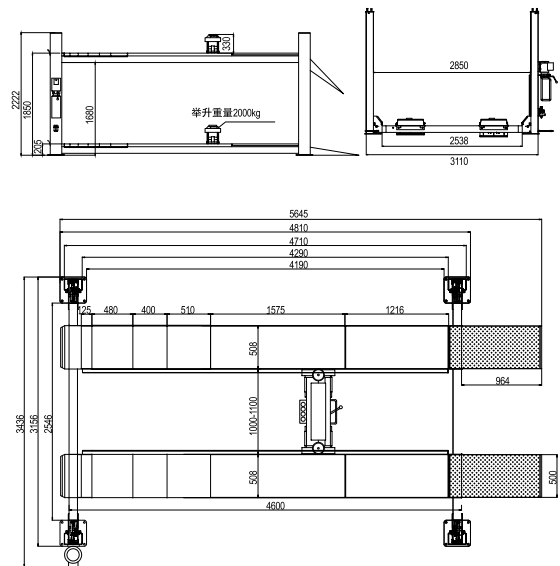

Detail



Air cylinder for air release.



Oil cylinder with explosion-proof valve.



Insurance piece in side the column.



Up ramp with yellow slider can warn people and protect friction.



The valve control platform and rolling jack.



Optional rolling jack.

OPARCK

More information please login:
www.oparck.com www.sxdinggao.en.alibaba.com

SHAOXINGDINGGAOMECHANICAL EQUIPMENT CO., LTD.

NO.186 Mashan Road, Paojiang Industrial Zone, Shaoxing, Zhejiang, China
 TEL: 0086-0575-84623366 FAX: 0086-0575-84623331
 E-mail: lichao@dinggaomechanical.com



www.oparck.com



www.sxdinggao.en.alibaba.com



YH-4.0D

FOUR POST LIFT

More information please login
www.dinggaojx.cn
www.sxdinggao.en.alibaba.com

PRODUCT DESCRIPTION

- Four-post scissor lift are ideal repair equipment for 4S stores.
- Platform overall forming bearing up to 4tons, and the maximum lifting height is 1900 mm.
- Pneumatic insurance mechanism and wire rope breakage insurance mechanism, double insurance, safer.
- Explosion-proof valves on the oil road can effectively protect the falling caused by tubing burst.
- Four columns secure level accurate adjustable.
- All moving parts are equipped with grease nipple ,convenient filling lubricating oil.
- Control the lifting of the main engine and auxiliary engine through the conversion valve.




YH-4.0D

FOUR POST LIFT




Technical parameters

Model	YH-4.0D
LxWxH	5958x3436x2222mm
Lifting Height	1900mm
Small Scissors Lifting Height	380mm
Lifting Time	50s
Length of Columns	4390mm
Overall Length	5958mm
Inside Soleplate of Columns Width	2546mm
Overall Width	3436mm
Platform Length	4700mm
Lifting Capacity	(9000lbs)4000kg
Small Scissor Lifting Capacity	3000kg
Packing Size	5250x600x840mm
Gross Weight	1600kg

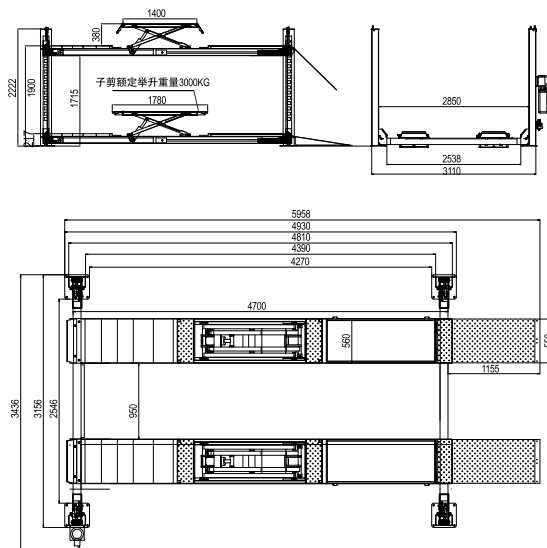

Detail

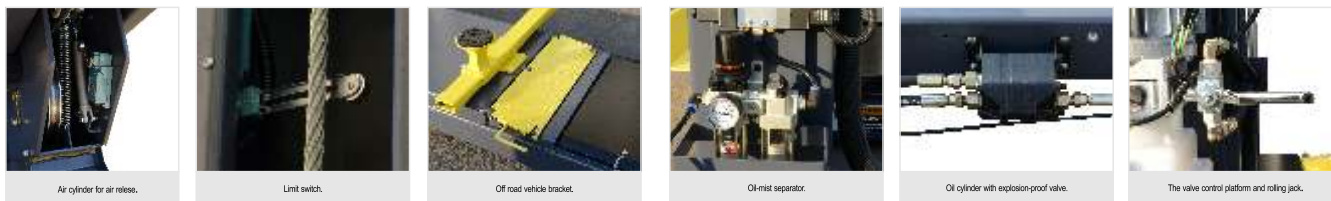

OPARICK

More information please login:
www.dinggaojx.cn www.sxdinggao.en.alibaba.com

SHAOXINGDINGGAOMECHANICAL EQUIPMENT CO., LTD.

NO186 Mashan Road Paojiang Industrial Zone Shaoxing Zhejiang China
 TEL: (0086-0575-84623865 FAX: (0086-0575-84623331)
 E-mail: lichao_dinggao@mechanical.com



www.dinggaojx.cn



www.sxdinggao.en.alibaba.com



YH-4.5BWL

FOUR POST LIFT

More information please login
www.oparck.com
www.sxdinggao.en.alibaba.com

PRODUCT DESCRIPTION

- Beams using high strength H steel.
- Platform overall forming bearing up to 4.5 tons.
- Manual reset locking mechanism, long service life, safety and reliable, Adjustable bumper.
- Wire rope fracture protective system, can effectively prevent the steel wire rope dorp fast when fracture.
- Yellow warning parts on the up ramp, at the same time of warning also protect the ground friction.
- Optional hydraulic secondary lifting trolley, bearing 4500 lbs, lifting height 330mm, and has a trolley hose bracket on the column.
- There is throttle valve on the channel for oiling.
- Four columns secure level accurate adjustable.
- All moving parts are equipped with grease nipple, convenient filling lubricating oil.




YH-4.5BWL

FOUR POST LIFT



Technical parameters

Model	YH-4.5BWL
LxWxH	5835x3600x2222mm
Lifting Height	1850mm
Lifting Time	50s
Length of Columns	4680mm
Overall Length	5835mm
Inside Soleplate of Columns Width	2710mm
Overall Width	3600mm
Platform Length	4990mm
Lifting Capacity	4500kg
Runway Width	508mm
Width Between Runway	1000-1100mm
Packing Size	5250x570x725mm
Gross Weight	1300kg

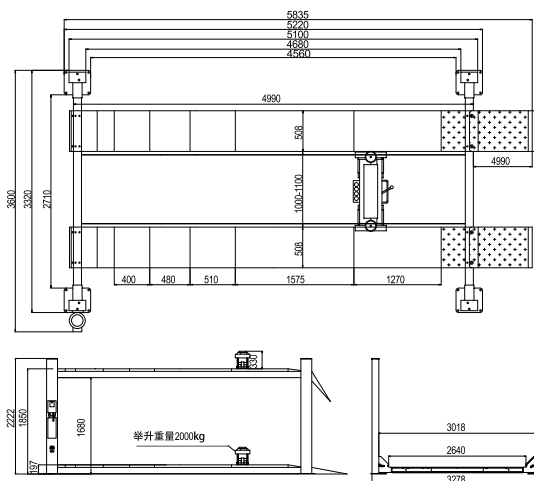

Detail



Oil cylinder with explosion-proof valve.



Safety structure.



Cable and pulley under main runway.



Down limit and oil-mist separator.



Slide plate for wheel alignment.



Slider can warn people and protect friction.

OPARICK

More information please login:
www.oparick.com www.sxdinggao.en.alibaba.com

SHAOXINGDINGGAOMECHANICALEQUIPMENT CO., LTD.

NO.186 Mashan Road, Paojiang Industrial Zone, Shaoxing, Zhejiang, China
 TEL: 0086-0575-84623366 FAX: 0086-0575-84623331
 E-mail: lichao@dinggaomechanical.com



www.oparick.com



www.sxdinggao.en.alibaba.com



YH-5.5

FOUR POST LIFT

More information please login
www.oparck.com
www.sxdinggao.en.alibaba.com

PRODUCT DESCRIPTION

- Beam using high strength H steel.
- Platform overall forming bearing up to 5.5T.
- With oil-water separator.
- Wire rope fracture protective system can effectively prevent the steel wire rope fast when fracture.
- Optional all cover slip plate, facilitate the vehicle four-wheel alignment accurately.
- Optional hydraulic rolling jack, can support up to 4500lb and the lifting height 330mm.
- Yellow warning parts on the slope, at the same time of warning also protect the ground friction.
- Four columns secure level accurate adjustable.
- There is throttle valve on the channel for oiling.
- Export pneumatic locking components, long service lift, high efficiency synchronization.




YH-5.5

FOUR POST LIFT



Technical parameters

Model	YH-5.5
LxWxH	6430x3595x2254mm
Lifting Height	1850mm
Lifting Time	50s
Length of Columns	4820mm
Overall Length	6430mm
Inside Soleplate of Columns Width	2655mm
Overall Width	3595mm
Platform Length	5160mm
Lifting Capacity	5500kg
Runway Width	508mm
Width Between Runway	1078mm
Packing Size	5380x560x800mm
Gross Weight	1680kg

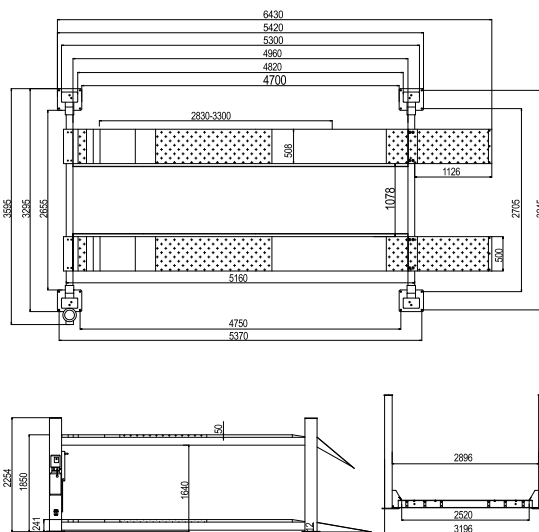

Detail



Active plate can fit for different size turntable.

Air cylinder for air release.

Nylon slide board for limit insurance piece.

Structure of cable and pulley under main runway.

Slide plate for wheel alignment.

Optional rolling jack.

Oil cylinder with explosion-proof valve.

OPARCK

More information please login:
www.oparck.com www.sxdinggao.en.alibaba.com

SHAOXINGDINGGAOMECHANICALEQUIPMENT CO., LTD.

NO.186 Mashan Road, Paojiang Industrial Zone, Shaoxing, Zhejiang, China
 TEL: 0086-0575-84623366 FAX: 0086-0575-84623331
 E-mail: lichao@dinggaomechanical.com



www.oparck.com



www.sxdinggao.en.alibaba.com



YH-6.5

FOUR POST LIFT

More information please login
www.oparck.com
www.sxdinggao.en.alibaba.com

PRODUCT DESCRIPTION

- Beam using high strength H steel .
- Platform overall molding, bearing up to 6.5 tons .
- Manual mechanical reset insurance mechanism .Safety, reliable and high efficiency synchronization.
- Export-type pneumatic safety components have long service life and high synchronization efficiency.
- Standard oil-water separator with pressure gauge.
- The wire rope fracture protective mechanism can effectively prevent the cable drop fast when fracture.
- Optional slide plate for four-wheel alignment.
- Optional hydraulic rolling jack, bearing 7000 pounds(3.2tons), convenient adjustment of the chassis and disassembling tyres.
- Yellow warning parts on the slope, at the same time of warning also protect the ground friction.
- Four columns secure level accurate adjustable.
- All moving parts are equipped with grease nipple ,convenient to fill lubricating oil.
- Suitable for 4s, middle and top grade auto maintenance companies.




YH-6.5

FOUR POST LIFT



Technical parameters

Model	YH-6.5
LxWxH	7040x3575x2254mm
Lifting Height	1850mm
Lifting Time	50s
Length of Columns	5430mm
Overall Length	7040mm
Inside Soleplate of Columns Width	2655mm
Overall Width	3575mm
Platform Length	5770mm
Lifting Capacity	6500kg
Runway Width	508mm
Width Between Runway	1078-1178mm
Packing Size	6010x570x900mm
Gross Weight	1800kg

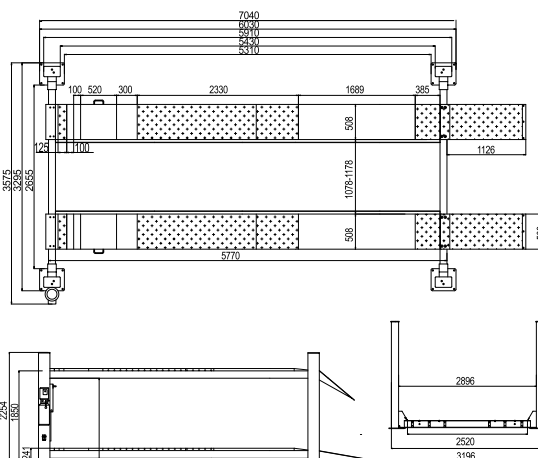

Detail



Active plate can fit for different size turntable.

Air cylinder for air release.

Nylon slide board for limit insurance piece.

Structure of cable and pulley under main runway.

Slide plate for wheel alignment.

Optional rolling jack.

Oil cylinder with explosion-proof valve.

OPARICK

More information please login:
www.oparick.com www.sxdinggao.en.alibaba.com

SHAOXINGDINGGAOMECHANICALEQUIPMENT CO., LTD.

NO.186 Mashan Road, Paojiang Industrial Zone, Shaoxing, Zhejiang, China
 TEL: 0086-0575-84623366 FAX: 0086-0575-84623331
 E-mail: lichao@dinggaomechanical.com



www.oparick.com



www.sxdinggao.en.alibaba.com



YH-12

FOUR POST LIFT

More information please login
www.oparck.com
www.sxdinggao.en.alibaba.com

PRODUCT DESCRIPTION

- Beam using high strength H steel .
- Platform overall molding, bearing up to 12 tons .
- Manual mechanical reset insurance mechanism .Safety, reliable and high efficiency synchronization.
- Export-type pneumatic safety components have long service life and high synchronization efficiency.
- Standard oil-water separator with pressure gauge.
- The wire rope fracture protective mechanism can effectively prevent the cable drop fast when fracture.
- Optional slide plate for four-wheel alignment.
- Optional hydraulic rolling jack, bearing 7000 pounds(3.2tons), convenient adjustment of the chassis and disassembling tyres.
- Yellow warning parts on the slope, at the same time of warning also protect the ground friction.
- Four columns secure level accurate adjustable.
- All moving parts are equipped with grease nipple ,convenient to fill lubricating oil.
- Suitable for 4s, middle and top grade auto maintenance companies.




YH-12

FOUR POST LIFT



Technical parameters

Model	YH-12
LxWxH	8753x3998x2365mm
Lifting Height	1800mm
Lifting Time	50s
Length of Columns	6960mm
Overall Length	8753mm
Inside Soleplate of Columns Width	3298mm
Overall Width	3998mm
Platform Length	7500mm
Lifting Capacity	12000kg
Runway Width	610mm
Width Between Runway	1126mm

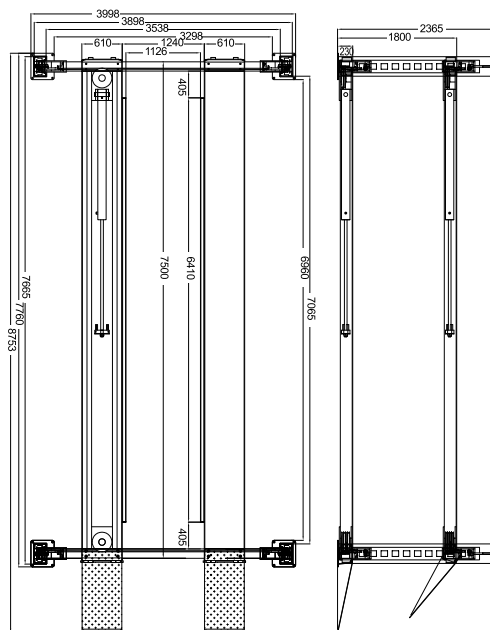

Detail



Active plate can fit for different size turntable.



Air cylinder for air release.



Up ramp with slider can protect friction.



Structure of cable and pulley under main runway.



Insurance piece in side the column.



Oil-mist separator.



Cable connection under main platform.

OPARICK

More information please login:
www.dinggaojx.cn www.sxdinggao.en.alibaba.com

SHAOXINGDINGGAOMECHANICAL EQUIPMENT CO., LTD.

NO.186 Mashan Road, Paojiang Industrial Zone, Shaoxing, Zhejiang, China
 TEL: 0086-0575-84623366 FAX: 0086-0575-84623331
 E-mail: lichao@dinggaomechanical.com



www.dinggaojx.cn



www.sxdinggao.en.alibaba.com