



PP-9XLT

FOUR POST LIFT

More information please login
www.dinggaojx.cn
www.sxdinggao.en.alibaba.com

PRODUCT DESCRIPTION

- The beam is formed by cold drawing with high strength steel.
- The platform is made of high-quality decorative plate.
- The manual mechanical self-resetting unlocking structure can adjust the unlocking lever according to the actual needs within the design range. The unlocking handle is equipped with a metal soft zipper that can be unlocked even at the highest position, which is safe and reliable.
- Each wire rope is provided with an insurance mechanism to prevent the equipment from falling when the wire rope is broken.
- Yellow warning parts on the slope.at the same time of warning also protect the ground friction.
- The columns are made of high strength steel and are formed by cold drawing. Each column has safety holes, which can be locked at any height within the design range.
- The equipment passed dynamic load test of 125% and static load test of 150%, and passed CE certification.
- Optional bolt type iron upper plate or plug-in type aluminum alloy upper plate.
- Each equipment is equipped with four sets of fast-installed mobile pulley set at the bottom of the four columns. Under the condition of no load, the equipment only needs two people to operate, so that the equipment can move freely on the flat ground.





PP-9XLT

FOUR POST LIFT



Technical parameters


| | |
|-----------------------------------|------------------|
| Model | PP-9XLT |
| LxWxH | 5952x2870x2516mm |
| Lifting Height | 2119mm on lock |
| Lifting Time | 50s |
| Length of Inside Columns | 4688mm |
| Overall Length | 5952mm |
| Inside Soleplate of Columns Width | 2490mm |
| Overall Width | 2870mm |
| Platform Length | 4822mm |
| Lifting Capacity | (9000lbs)4000kg |
| Runway Width | 475mm |
| Width Between Runway | 964mm |
| Packing Size | 4900x570x730mm |
| Gross Weight | 1136kg |

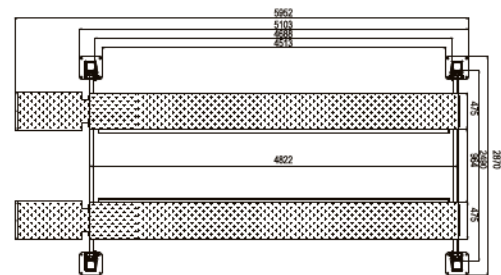

Detail



Caster kit can make people move lift easy when no-load.



Safety mechanism for protect quickly declined cause by cable breakage.




Manual safety bar for release.



Oil cylinder with explosion-proof valve.



Cable and pulley under main platform.



Cable connection under main platform.

OPARICK

More information please login:
www.dinggaojx.cn www.sxdinggao.en.alibaba.com

SHAOXINGDINGGAOMECHANICAL EQUIPMENT CO., LTD.

NO.186 Mashan Road, Paojiang Industrial Zone, Shaoxing, Zhejiang, China
 TEL: 0086-0575-84623366 FAX: 0086-0575-84623331
 E-mail: lichao@dinggaomechanical.com



www.dinggaojx.cn



www.sxdinggao.en.alibaba.com