



YH-5.5

FOUR POST LIFT

More information please login
www.dinggaojx.cn
www.sxdinggao.en.alibaba.com

PRODUCT DESCRIPTION

- Beam using high strength H steel.
- Platform overall forming bearing up to 5.5T.
- With oil-water separator.
- Wire rope fracture protective system can effectively prevent the steel wire rope fast when fracture.
- Optional all cover slip plate, facilitate the vehicle four-wheel alignment accurately.
- Optional hydraulic rolling jack, can support up to 4500lb and the lifting height 330mm.
- Yellow warning parts on the slope, at the same time of warning also protect the ground friction.
- Four columns secure level accurate adjustable.
- There is throttle valve on the channel for oiling.
- Export pneumatic locking components, long service lift, high efficiency synchronization.




YH-5.5

FOUR POST LIFT




Technical parameters


Model	YH-5.5
LxWxH	6430x3595x2254mm
Lifting Height	1850mm
Lifting Time	50s
Length of Columns	4820mm
Overall Length	6430mm
Inside Soleplate of Columns Width	2655mm
Overall Width	3595mm
Platform Length	5160mm
Lifting Capacity	5500kg
Runway Width	508mm
Width Between Runway	1078mm
Packing Size	5380x560x800mm
Gross Weight	1680kg

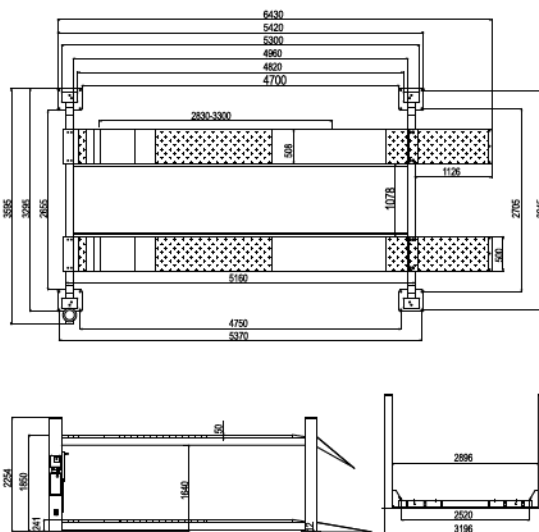

Detail




Active plate can fit for different size turntable.




Air cylinder for air release.



Nylon slide board for limit insurance piece.



Structure of cable and pulley under main runway.



Slide plate for wheel alignment.



Optional rolling jack.



Oil cylinder with explosion-proof valve.

OPARICK

More information please login:
www.dinggaojx.cn www.sxdinggao.en.alibaba.com

SHAOXINGDINGGAOMECHANICAL EQUIPMENT CO., LTD.

NO.186 Mashan Road, Paojiang Industrial Zone, Shaoxing, Zhejiang, China
 TEL: 0086-0575-84623366 FAX: 0086-0575-84623331
 E-mail: lichao@dinggaomechanical.com



www.dinggaojx.cn



www.sxdinggao.en.alibaba.com