



YH-4.5BWL

FOUR POST LIFT

More information please login
www.dinggaojx.cn
www.sxdinggao.en.alibaba.com

PRODUCT DESCRIPTION

- Beams using high strength H steel.
- Platform overall forming bearing up to 4.5 tons.
- Manual reset locking mechanism, long service life, safety and reliable, Adjustable bumper.
- Wire rope fracture protective system, can effectively prevent the steel wire rope dorp fast when fracture.
- Yellow warning parts on the up ramp, at the same time of warning also protect the ground friction.
- Optional hydraulic secondary lifting trolley, bearing 4500 lbs, lifting height 330mm, and has a trolley hose bracket on the column.
- There is throttle valve on the channel for oiling.
- Four columns secure level accurate adjustable.
- All moving parts are equipped with grease nipple, convenient filling lubricating oil.




YH-4.5BWL

FOUR POST LIFT




Technical parameters


Model	YH-4.5BWL
LxWxH	5835x3600x2222mm
Lifting Height	1850mm
Lifting Time	50s
Length of Columns	4680mm
Overall Length	5835mm
Inside Soleplate of Columns Width	2710mm
Overall Width	3600mm
Platform Length	4990mm
Lifting Capacity	4500kg
Runway Width	508mm
Width Between Runway	1000-1100mm
Packing Size	5250x570x725mm
Gross Weight	1300kg

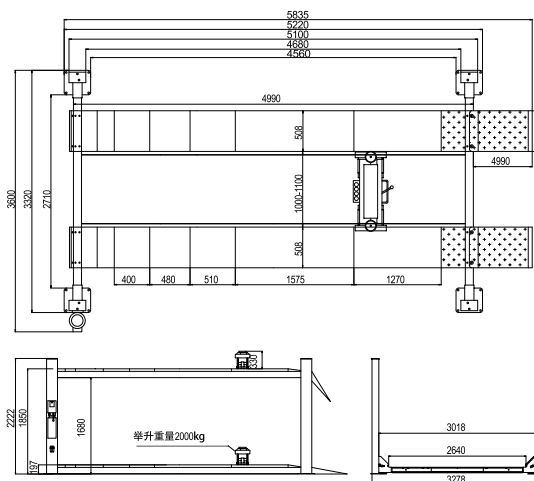


Detail



Oil cylinder with explosion-proof valve.




Safety structure.



Cable and pulley under main runway.



Down limit and oil-mist separator.



Slide plate for wheel alignment.



Slider can warn people and protect friction.

OPARICK

More information please login:
www.dinggaojx.cn www.sxdinggao.en.alibaba.com

SHAOXINGDINGGAOMECHANICAL EQUIPMENT CO., LTD.

NO.186 Mashan Road, Paojiang Industrial Zone, Shaoxing, Zhejiang, China
 TEL: 0086-0575-84623366 FAX: 0086-0575-84623331
 E-mail: lichao@dinggaomechanical.com



www.dinggaojx.cn



www.sxdinggao.en.alibaba.com