



YH-12

FOUR POST LIFT

四柱举升机

更多信息请登录
More information please login
www.oparck.com
www.sxdinggao.en.alibaba.com

产品说明

- 梁采用高强度H钢。
- 平台整体成型，承重可达12T。
- 手动机械复位保险机构。安全、可靠、高效同步。
- 出口型气动安全元件使用寿命长，同步效率高。
- 带压力表的标准油水分离器。
- 钢丝绳断裂保护机构能有效防止钢丝绳断裂时快速下落。
- 可选配侧滑板，用于四轮定位。
- 可选配二次举升小车，承载7000lbs(3.2T),方便调整底盘和拆卸轮胎。
- 上坡板黄色警示条，在起到警示的同时可保护地面磨损。
- 四柱安全水平精确可调。
- 所有运动部件均配有黄油嘴，便于加注润滑油。
- 适用于4S、中高档汽车维修公司。

PRODUCT DESCRIPTION

- Beam using high strength H steel .
- Platform overall molding, bearing up to 12 tons .
- Manual mechanical reset insurance mechanism .Safety,reliable and high efficiency synchronization.
- Export-type pneumatic safety components have long service life and high synchronization efficiency.
- Standard oil-water separator with pressure gauge.
- The wire rope fracture protective mechanism can effectively prevent the cable drop fast when fracture.
- Optional slide plate for four-wheel alignment.
- Optional hydraulic rolling jack, bearing 7000 pounds(3.2tons),convenient adjustment of the chassis and disassembling tyres.
- Yellow warning parts on the slope, at the same time of warning also protect the ground friction.
- Four columns secure level accurate adjustable.
- All moving parts are equipped with grease nipple ,convenient to fill lubricating oil.
- Suitable for 4s,middle and top grade auto maintenance companies.



YH-12


FOUR POST LIFT

四柱举升机



技术参数 Technical parameters

Model	YH-12
LxWxH	8753x3998x2365mm
Lifting Height	1800mm
Lifting Time	50s
Length of Columns	6960mm
Overall Length	8753mm
Inside Soleplate of Columns Width	3298mm
Overall Width	3998mm
Platform Length	7500mm
Lifting Capacity	12000kg
Runway Width	610mm
Width Between Runway	1126mm

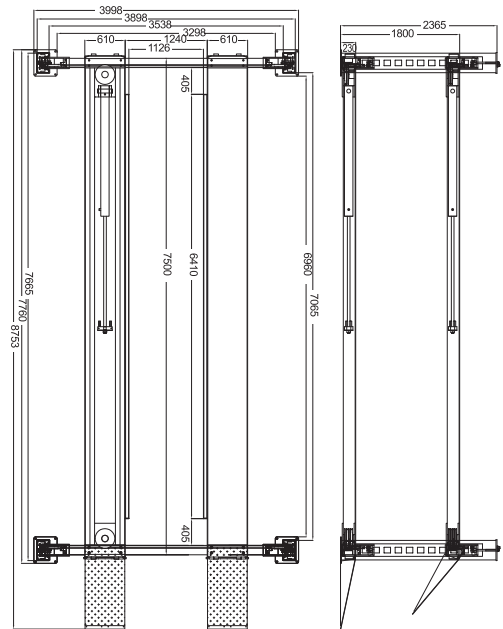

细节说明 Detail




活动板可适用于不同尺寸的转角盘。
Active plate can fit for different size turntable.



气动解锁气缸。
Air cylinder for air release.



带滑块的上坡道可以保护摩擦。
Up ramp with slider can protect friction.



主跑道下电缆和滑轮的结构。
Structure of cable and pulley under main runway.



立柱内保险片。
Insurance piece in side the column.



油水分离器
Oil-mist separator.



主平台下的钢丝绳连接。
Cable connection under main platform.

OPARICK

更多信息请登录 More information please login:
www.oparck.com www.sxdinggao.en.alibaba.com

绍兴鼎高机械设备有限公司
SHAOXINGDINGGAOMECHANICAL EQUIPMENT CO., LTD.

浙江省绍兴市袍江工业区马山路186号
NO.186 Mashan Road, Paojiang Industrial Zone, Shaoxing, Zhejiang, China
TEL: 0086-0575-84623366 FAX: 0086-0575-84623331
E-mail: lichao@dinggaomechanical.com



www.oparck.com



www.sxdinggao.en.alibaba.com